


RKU is a wireless and screwless touch button, water resistant wall plate controller designed to work with RAKO lighting systems and bathomatic.

Normal Mode

It behaves and works like any other RAKO's RCP07 or similar wireless push button wall plate controller with 4 scenes, off and master raise and lower buttons

bathomatic Mode

It controls a designated bathomatic system allowing the first 4 presets to be run, paused and draining of the bath

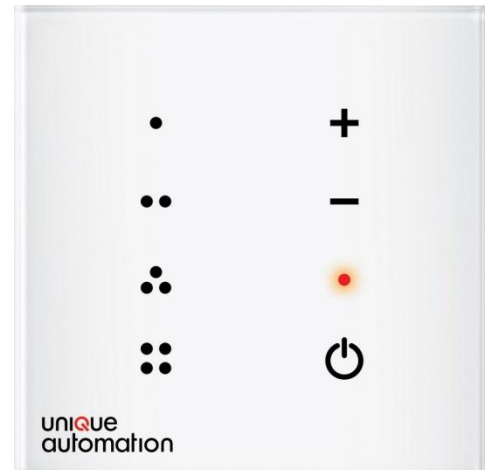


The RKU are designed to be flush mounted anywhere including wet areas in a single gang UK back boxes. RAKOM coded radio transmission eliminates the need for any data cables and only 12V DC power supply is required minimising the installation fuss and disruption.

Versions Available:

- RKU-001-BK - White finish
- RKU-001-WT - White finish

Dimensions:

- Glass front plate - 86x86x3mm
- Controller body depth 27mm

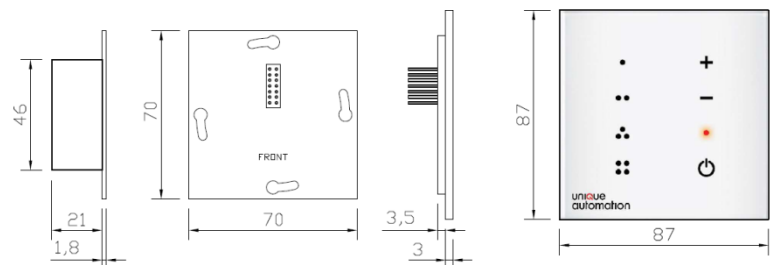

Flush mounting into standard UK single gang back box, minimum 30mm deep. The box needs to be installed 6mm deeper than the surface of the wall.

Power Supply: 12V DC

Climate range temperature: +2C to +40C

Humidity: +5% to 99% non submerged in water

Communication: RAKOM coded fm radio, 433.9MHz

Memory: Flash memory (non volatile)

Note: RKU cannot be put in programming mode as it does not allow multi-button presses